


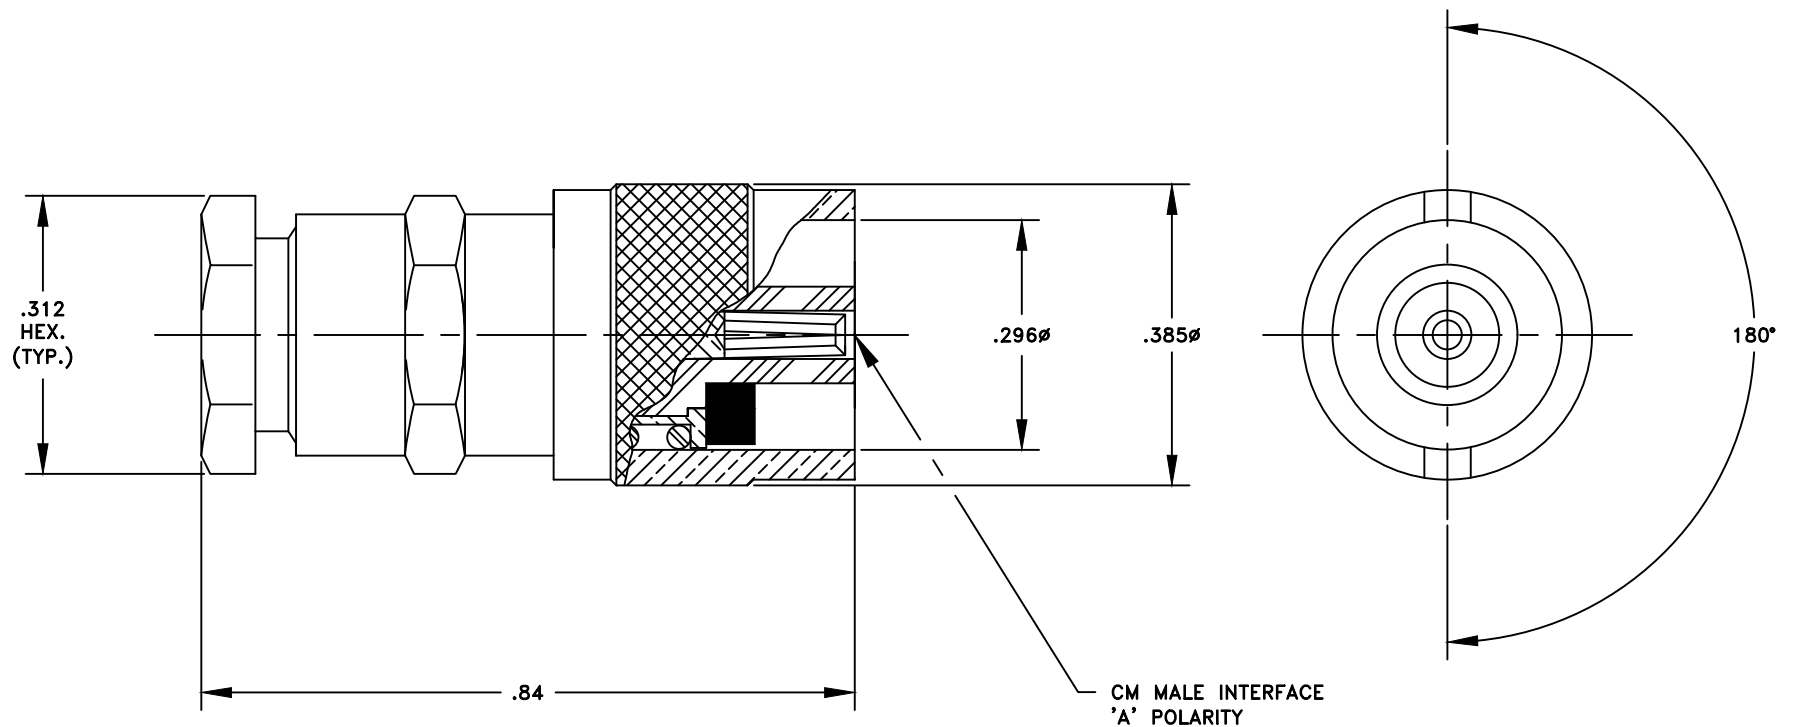

908 South Walnut Street,
Edinburgh, IN 46124

CAGE Code: 43608

(812) 526-8801
sales@connectronicsinc.com
www.connectronicsinc.com

Part Description:

CM MALE, CABLE CLAMP

Notes:

- All dimensions are in inches.
- Unless otherwise specified, all dimensions are nominal.

Tolerances

Unless otherwise specified

.X ±0.2
.XX ±0.02
.XXX ±0.005

Part Number:

40-201-4

Rev Level

D

© Connectronics, Inc. 2020 All Rights Reserved.

A. Component Materials:

1. Body: Brass
2. Contact: Beryllium Copper
3. Coupling Nut: Brass
4. Bushing: Brass
5. Cable Nut: Brass
6. Washer: Brass
7. Clamp: Brass
8. Spring: 303 Stainless Steel
9. Gaskets: Buna
10. Insulator: PTFE

B. Component Plating:

1. Body: Gold
2. Contact: Gold
3. Coupling Nut: Gold
4. Bushing: Gold
5. Cable Nut: Gold
6. Washer: Gold
7. Clamp: Gold

C. Environmental Specifications:

1. Operating Temperature Range: -40° C to +120° C

D. Electrical Specifications:

1. Impedance: Non-Constant
2. Frequency Range: DC to 1 GHz
3. Voltage Rating (AC): 1,500 Vrms
4. Insulation Resistance: 5,000 MOhm
5. Dielectric Withstanding Voltage (AC): 750 Vrms

E. Mechanical Specifications:

1. Polarity: Standard
2. Interface Specification: MIL-STD-348A
3. Mating Cycles: 500

F. Compliance Specifications:

1. RoHS and REACH Compliant
2. DFARS Compliant

G. Cable Compatibility:

1. Outer Jacket Max: .095ø
Primary Insulator Max: .066ø
Inner Conductor Max: .035ø



908 South Walnut Street
Edinburgh, IN 46124

CAGE Code: 43608

(812) 526-8801
sales@connectronicsinc.com
www.connectronicsinc.com

Part Description:

CM MALE, CABLE CLAMP

Technical Data Sheet

©Connectronics, Inc. 2021 All Rights Reserved

Part Number:

40-201-4

Rev Level

D