


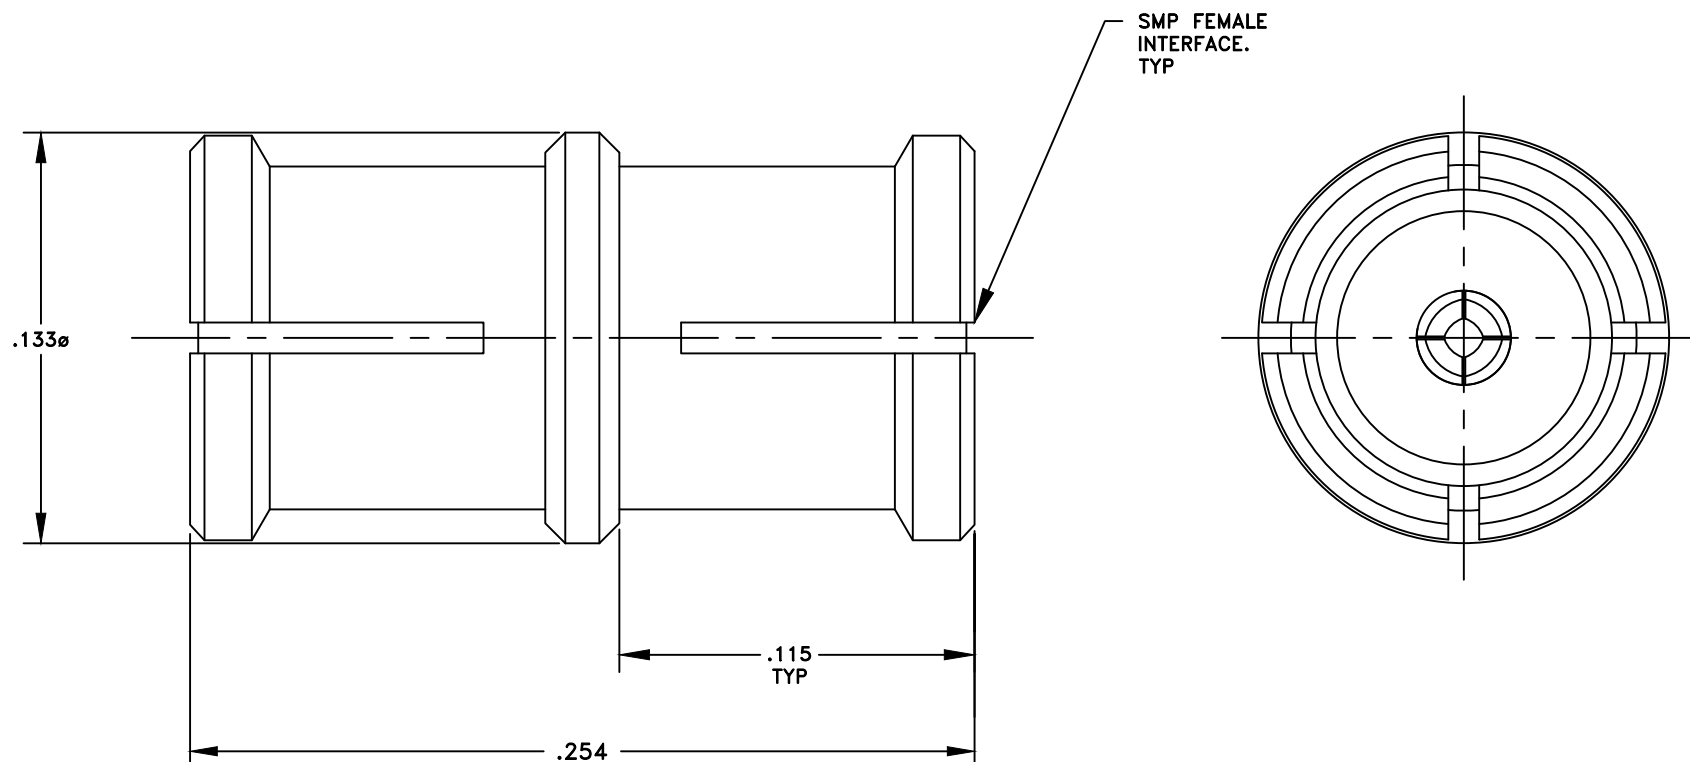

908 South Walnut Street,
Edinburgh, IN 46124

CAGE Code: 43608

(812) 526-8801
sales@connectronicsinc.com
www.connectronicsinc.com

Part Description:

SMP FEMALE TO FEMALE

Notes:

- All dimensions are in inches.
- Unless otherwise specified, all dimensions are nominal.

Tolerances

Unless otherwise specified

.X ±0.2
.XX ±0.02
.XXX ±0.005

Part Number:

62-602-1

Rev Level

REL

© Connectronics, Inc. 2020 All Rights Reserved.

A. Component Materials:

1. Body: Beryllium Copper
2. Contact: Beryllium Copper
3. Insulator: PTFE

B. Component Plating:

1. Body: Gold
2. Contact: Gold

C. Environmental Specifications:

1. Operating Temperature Range: -65° C to +165° C

D. Electrical Specifications:

1. Impedance: 50 Ohm
2. Frequency Range: DC to 40 GHz
3. Dielectric Withstanding Voltage (AC): 500 VRMS

E. Mechanical Specifications:

1. Polarity: Standard
2. Interface Specification: MIL-STD-348A
3. Mating Cycles: 500

F. Compliance Specifications:

1. RoHS and REACH Compliant
2. DFARS Compliant



908 South Walnut Street
Edinburgh, IN 46124

CAGE Code: 43608

(812) 526-8801
sales@connectronicsinc.com
www.connectronicsinc.com

Part Description:

SMP FEMALE TO FEMALE

Technical Data Sheet

©Connectronics, Inc. 2021 All Rights Reserved

Part Number:

62-602-1

Rev Level

REL